Lexmark T640rn

Additional Accessories

Connectivity	MarkNet™ N7000 Series External Print Servers	
	N7000e Fast Ethernet - 1 port - USB	14T0230
	N7002e Fast Ethernet - 1 port - Parallel	14T0240
	N7020e Gigabit Ethernet - 4 port - USB	14T0220
	MarkNet N4000e Ethernet 10/100BaseTX	14T0030
	Wireless	
	N4050e 802.11g Print Server	14T0145
	802.11g Print Adapter	1010042
Cable Options	USB 6-foot Cable	1021294
	Parallel 10-foot high speed bidirectional Cable	1021231
Print Media	Transparencies	70X7240

Lexmark T640rn

- **Program RFID tag while printing**

- **High-performance workgroup printer**

- **Broad range of paper-handling options**

- **Advanced user interface for easy operation**

LEXMARK™

Lexmark T640rn

- EPC Global Class 1, Generation 2 tag compatible
- ImageQuick standard for fast graphic printing
- USB Direct interface for quick walk-up printing from USB flash memory drive
- Optional 802.11g wireless networking

Lexmark T640rn

Product Specifications

Part Number	US/Canada: 20G1500
Product Class	Small workgroup laser printer
Speed	Up to 35 ppm (up to 12 ppm with RFID media)
Resolution	1200 x 1200 dpi, 2400 image quality, 1200 image quality, 600 x 600 dpi
Time to First Page	As fast as 6 seconds
Processor	400 MHz
Memory (std./max.)	192MB/576MB
Electronic Forms	Forms Card and 32MB Flash Memory included
Connectivity Standard	Ethernet, Parallel, USB, USB Direct Interface
Network Mgmt. Utility	MarkVision™ Professional
Operating Systems	Windows, Linux, UNIX, Mac, NetWare, and OS/400 **For a complete list, visit www.lexmark.com.**
Printer Languages	PostScript 3 and PCL 6 emulations, PPDS Migration Tool
Direct Print Formats	PDF v1.5, JPEG, JPG, TIFF, GIF, PNG, BMP, PCX and DCX
Fonts	PCL: 89 scalable, 2 bitmapped. Includes OCR-A, OCR-B and Code 3 of 9 bar codes; PostScript: 158 scalable; PPDS: 39 scalable and 5 bitmapped
Size (WxDxH)	16.6 in. x 19.6 in x 13.6 in. (421 mm x 498 mm x 345 mm)
Weight	38 lb. (17.4 kg)
Acoustics	53 dBA printing; 30 dBA idle
Duty Cycle	Up to 200,000 pages per month[1]
Warranty	1-year Onsite Repair

Media Specifications

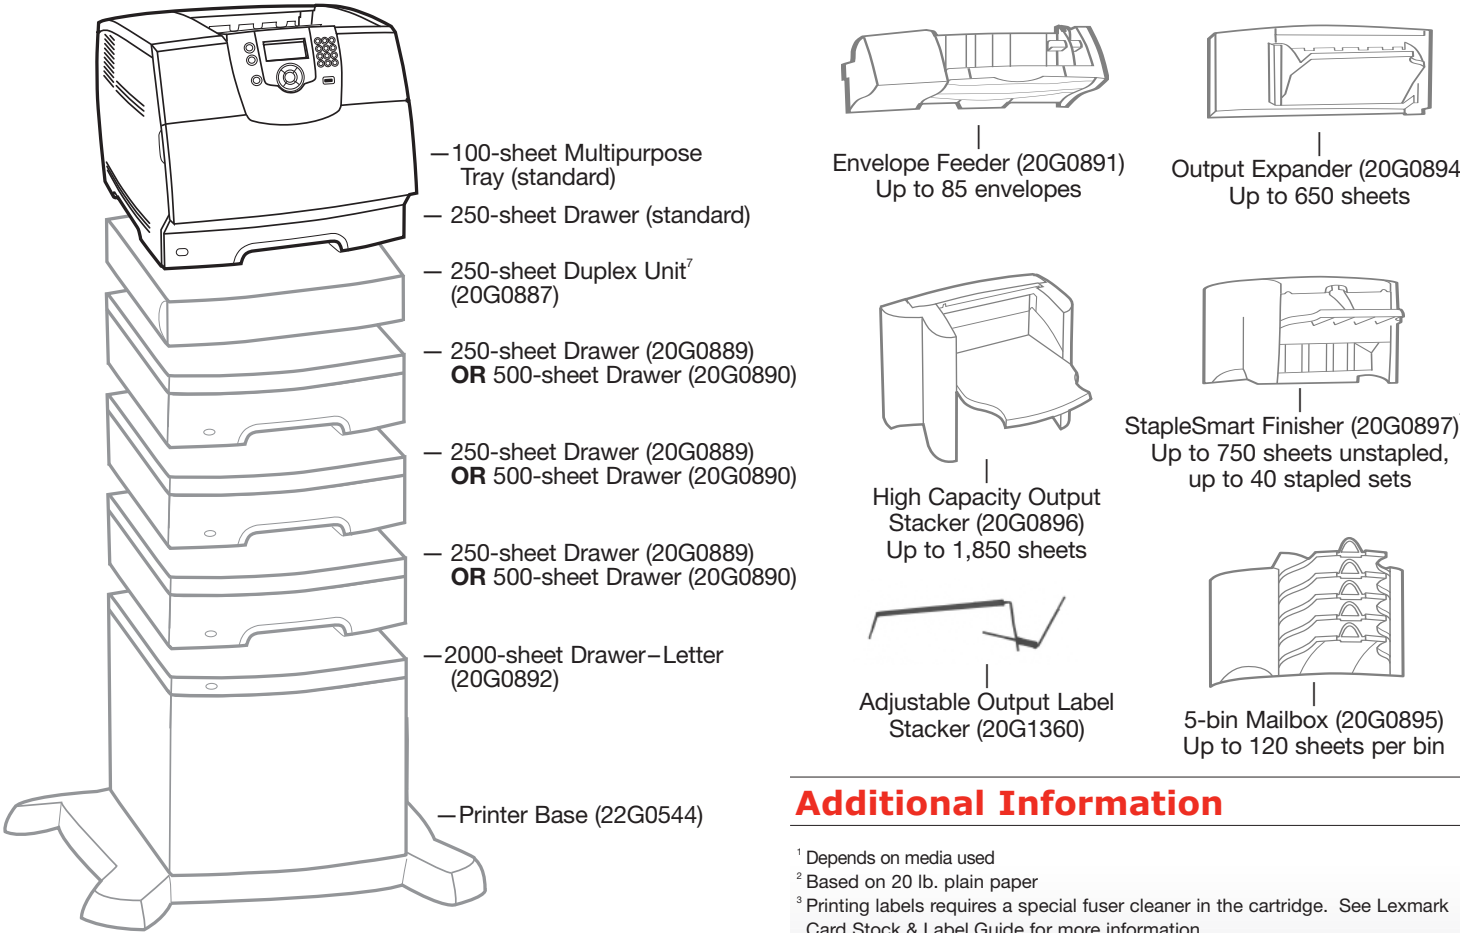|	
Paper Capacity[2] (sheets) Standard Input	350 (250+100 MPT)
Maximum Input	3,850
Standard Output	250
Maximum Output	2,750
Paper Sources Standard Input	2
Maximum Input	7
Standard Output	1
Maximum Output	11
Media Types	Plain paper, bond, envelopes, card stock, transparencies, paper labels[3], dual-web labels[3], polyester labels[3], vinyl labels[3]
Media Sizes	Letter, legal, A4, A5, JIS B5, statement, executive, folio, universal (2.75 x 5 in. to 8.5 x 14 in.), and envelopes (7 3/4, 9, 10, DL, C5, B5, other)
Media Weights	Plain paper: 16 to 47 lb. (60 to 176 g/m²); Card stock: up to 110 lb. Index (199 g/m²)
RFID Labels	EPC Global Class 1, Generation 2 compatible[4]

In the Box

Lexmark T640rn
- Lexmark T640n Printer
- 21,000-page Return Program Print Cartridge for labels[5]
- Power Cord
- Publications CD
- Drivers and Utilities CD
- Forms Card
- RFID Enabled

Supplies & Accessories

Supplies	21,000-page High Yield Return Program Print Cartridge[5]	64015HA[6]
	21,000-page High Yield Print Cartridge[5]	64035HA[6]
	21,000-page High Yield Return Program Print Cartridge for Labels[5]	64004HA[6]
	6,000-page Return Program Print Cartridge[5]	64015SA[6]
	6,000-page Print Cartridge[5]	64035SA[6]
	Staple Cartridge	11K3188
	Routine Maintenance Item: Maintenance Kit	40X0100
Memory/Flash Options	256MB DDR RAM	13N1524
	512MB DDR RAM	13N1526
	64MB Flash Card	1021209
Furniture	Low Profile Printer Stand	16C0379
	Printer Stand with Cabinet	16C0369
	Printer Stand	16C0389
	T6xx Printer Base	22G0544

Paper Handling Options

- 100-sheet Multipurpose Tray (standard)
- 250-sheet Drawer (standard)
- 250-sheet Duplex Unit[7] (20G0887)
- 250-sheet Drawer (20G0889) **OR** 500-sheet Drawer (20G0890)
- 250-sheet Drawer (20G0889) **OR** 500-sheet Drawer (20G0890)
- 250-sheet Drawer (20G0889) **OR** 500-sheet Drawer (20G0890)
- 2000-sheet Drawer–Letter (20G0892)
- Printer Base (22G0544)

Envelope Feeder (20G0891) Up to 85 envelopes

Output Expander (20G0894) Up to 650 sheets

High Capacity Output Stacker (20G0896) Up to 1,850 sheets

StapleSmart Finisher (20G0897)[7,8] Up to 750 sheets unstapled, up to 40 stapled sets

Adjustable Output Label Stacker (20G1360)

5-bin Mailbox (20G0895) Up to 120 sheets per bin

Options not pictured:
250-sheet Tray (20G0879)
500-sheet Tray (20G0884)[9]
250-sheet Universally Adjustable Drawer (20G1223)
250-sheet Universally Adjustable Tray (20G1224)[11]
400-sheet Universally Adjustable Drawer (20G1218)
400-sheet Universally Adjustable Tray (20G1217)[10]

Additional Information

[1] Depends on media used
[2] Based on 20 lb. plain paper
[3] Printing labels requires a special fuser cleaner in the cartridge. See Lexmark Card Stock & Label Guide for more information
[4] Testing is recommended for specific tag and label compatibility
[5] Declared standard page yield value in accordance with ISO/IEC 19752
[6] Designed for use only in the USA and Canada
[7] Not to be used with RFID media
[8] Can staple a maximum of 25 sheets per set
[9] Requires optional 500-sheet drawer
[10] Requires optional 400-sheet universally adjustable drawer
[11] Requires optional 250-sheet universally adjustable drawer